

TY175LL/A

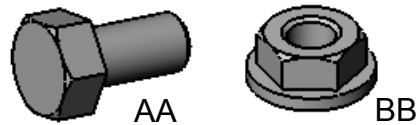
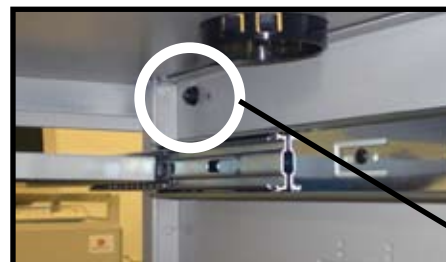
**DIGITAL LEARNING CART**
**PARTS LIST**

Qty	Part#	Description
1	022-2882	Cart Handle
1	TCPE10	10 Outlet Power Strip
1	018-0276	Data Pass Through Plate [incl (4) 6-32 x 1/2" flat head screws]

**HARDWARE LIST**

Ref	Qty	Part#	Description
AA	2	030-0307	5/16-18 x 5/8" Hex Hd Screws
BB	2	030-0411	5/16-18 Serrated Nuts
CC	2	030-0915	10-32MT x 3/8" Self Tapping Screws [Incl with TCPE10 power strip]
DD	4	030-0024	6-32 Hex Head Nuts


**STEP 1: INSTALL HANDLE**

**STEP 1A:** Pull out laptop shelf.

**STEP 1B:** Attach handle with screws (AA) and nuts (BB).


Secure nuts through interior of cart.

## STEP 2: INSTALL 10-OUTLET POWER STRIP

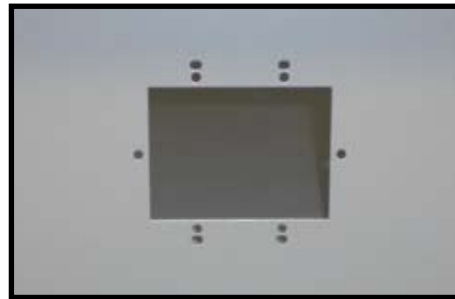


**STEP 2A:** Install screws (CC) into bottom shelf.



**STEP 2B:** Using the cross cutout on the back of the power strip, slide and snap power strip onto installed screws. **NOTE:** Your power strip cord should be on the same side as the bottom shelf grommet hole.

## STEP 3: INSTALL DATA PASS THROUGH PLATE



**STEP 3A:** Remove the cover plate under the handle.



**STEP 3B:** Using the four 6-32 x 1/2" flat head screws provided with the plate and the four 6-32 hex nuts (DD), install the data pass through plate to the side panel.

**Bretford**  
11000 Seymour Avenue  
Franklin Park, IL 60131 USA  
TEL: 847 678 2545  
800 521 9614  
FAX: 847 678 0852  
800 343 1779

**Bretford Ltd.**  
2 Etongate  
110 Windsor Road, Slough  
Berkshire SL1 2LA England  
TEL: 011 44 17 5353 9955  
FAX: 011 44 17 5353 9478

[www.bretford.com/apple](http://www.bretford.com/apple)